




SARDIUS MEDIA®

Quick Start Guide

E-25110-01 Model

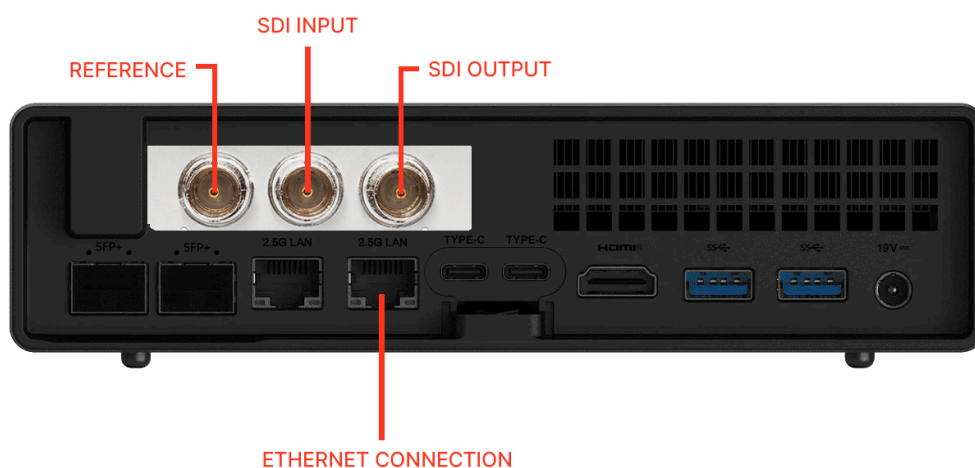

Installation

- ☐ Place the encoder in a location (shelf, rack, etc.) that allows for proper airflow. Do not stack anything below or on top of the encoder.
- ☐ Connect your SDI Cable, Network cable, power, and any peripherals (monitor, keyboard, etc.)
- ☐ Power on the unit

Network

- ☐ The unit is pre-configured for DHCP on the ethernet port indicated above
- ☐ If you need a different interface, follow the enclosed instructions to do so.

Contact Sardius Support to complete the configuration

- ☐ Make sure the Headless HDMI plug is inserted into the HDMI Port
- ☐ Email support@sardius.media to request a technician to complete the configuration
- ☐ Once the technician has completed the configuration, your account manager will schedule a complimentary training session
- ☐ **OPTIONAL**: Learn more about your new encoder and the best practices we recommend for its use

Encoder Documentation:

<https://support.sardius.media/knowledge-base/hardware#sardius-empla-encoder>

NOTE: TeamViewer is enabled on this encoder for our support team to provide fast and prompt service. If your environment does not allow for TeamViewer to operate, please inform our support team promptly.