




SARDIUS MEDIA®

Quick Start Guide

E-25920-11 Model

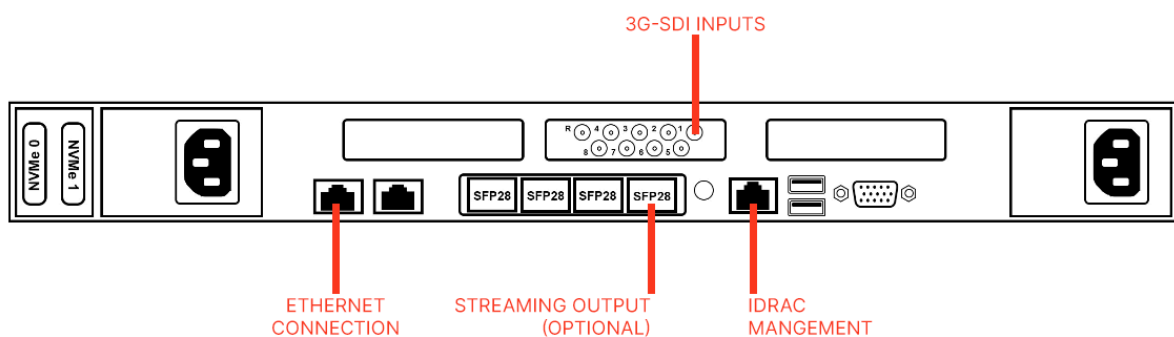

Installation

- ☐ Rack the encoder in a location that allows for proper airflow.
- ☐ Connect your 3G-SDI Cables, Network cable, power, and any peripherals (monitor, keyboard, etc.)
- ☐ Power on the unit

Network

- ☐ The unit is pre-configured for DHCP on the ethernet port indicated above
- ☐ If you need a different interface, follow the enclosed instructions to do so.

Contact Sardius Support to complete the configuration

- ☐ Email support@sardius.media to request a technician to complete the configuration
- ☐ Once the technician has completed the configuration, your account manager will schedule a complimentary training session
- ☐ **OPTIONAL**: Learn more about your new encoder and the best practices we recommend for its use

Encoder Documentation:

<https://support.sardius.media/knowledge-base/hardware#sardius-empla-encoder>

NOTE: TeamViewer is enabled on this encoder for our support team to provide fast and prompt service. If your environment does not allow for TeamViewer to operate, please inform our support team promptly.